



VSA152-G270T02-I

V1.2

1.

VSA152-G270T02-I

2.

-
-
-
-
-
-
-
-

3.

-
-
-
- MRI
-
-

4.
 T_A
 $U_C = \pm 15V \quad R_M$

(AC rms)	U_{PNAC}	--	--	1500	--	V
(DC)	U_{PNDC}	--	-1500	--	1500	V
	U_{POL}	1	-3000	--	3000	V
(DC)	U_c		± 9	--	± 15	V
	I_c	U_{POL}	--	± 120	--	mA
	K_N		3000:20			V/mA
	I_S	U_{POL}	--	± 20	--	mA
	R_M		0	50	100	
	X_e		--	0.1	--	
		50Hz	--	2	--	

5.


		U_a	50Hz 1min	--	4	--	kV

6.

	T_A	--		-10	--	+70	
	T_S	--		-25	--	+85	
	RH			20	--	80	%
	m	--		350±5			g

7.



7.1. (mm)

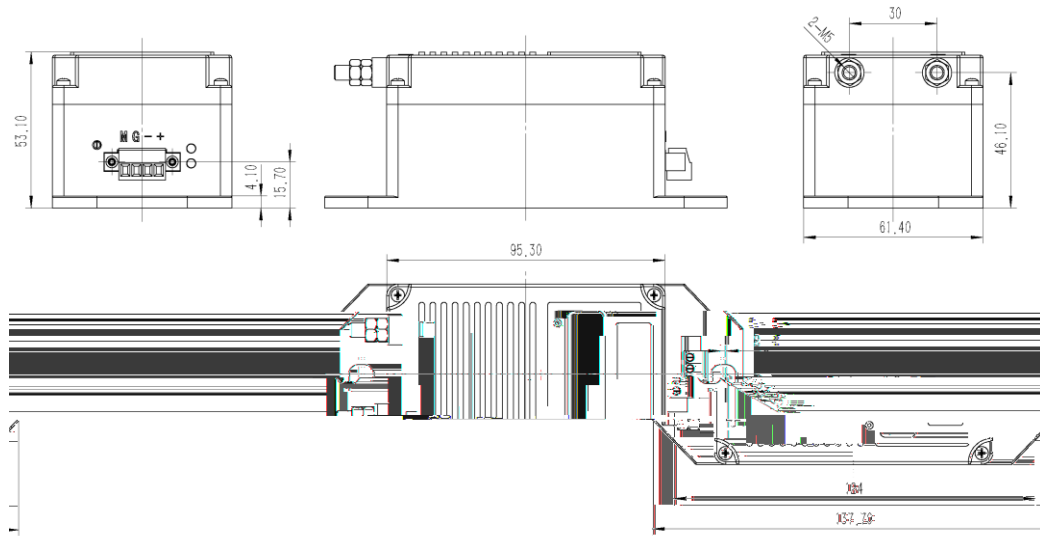

1

GB/T1804-2000 C


7.2.

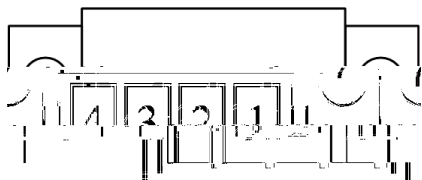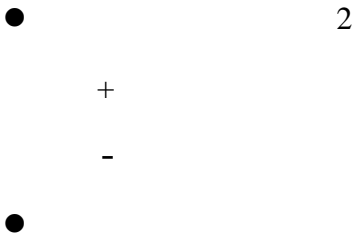

2

1	+	+U _C
2	-	-U _C
3	G	COM
4	M	I _s

8.

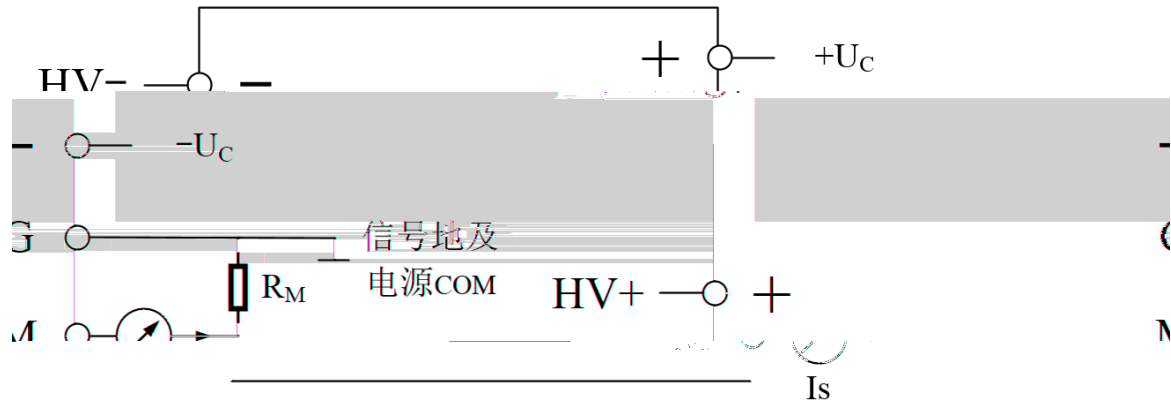

R_M

I_S

U_P

$$U_P = K_N * I_S$$

9.

1		VSA152-G270T02-I	1	
2		VSA152-G270T02-I	1	

10.

-
-
-



地址：湖南省长沙市经济技术开发区开元路17号湖南世纪新城14楼

邮编：410073

前台：0731-8839 2611

服务热线：0731-8839 2611

售后服务：0731-8839 2988-218

网址：www.vfe.ac.cn

